

# LED SPOT RGBW 5 W

LED-SP-RGBW-5 / 1-049-836

# CC

350 mA

Installationsanleitung  
Installation guide

DE

EN



**KONSTANTSTROM**  
**CONSTANT CURRENT**


## Technische Daten:

<b>Leistung</b>	5 W
<b>Versorgung</b>	Konstantstrom CC 4 x 350 mA Gemeinsame Anode
<b>Lichtausbeute</b>	120 lm
<b>DMX-Treiber</b>	DMX-CC / 1-046-759
<b>CRI</b>	Ra > 80
<b>IP Grad</b>	IP65, 0-99% rH
<b>Max. Temperatur Vorderseite</b>	-25° C ~ 125° C
<b>Max. Temperatur Rückseite</b>	-25° C ~ 40° C
<b>Abmessungen</b>	Ø 90 x 91 mm [DxH]
<b>Ausschnitt</b>	Ø 68 mm
<b>Glas</b>	Gehärtetes Milchglas
<b>Gehäuse</b>	AL6063
<b>Max. Lebensdauer</b>	30.000 h
<b>Anschlussleitung</b>	2 m (5 x 0,5 mm <sup>2</sup> )

## Technical specifications:




<b>Power</b>	5 W
<b>Supply</b>	Constant current CC 4 x 350 mA Common Anode
<b>Luminance</b>	120 lm
<b>DMX-Driver</b>	DMX-CC / 1-046-759
<b>CRI</b>	Ra > 80
<b>IP Grade</b>	IP65, 0-99% rH
<b>Max. temperature front</b>	-25° C ~ 125° C
<b>Max. temperature rear</b>	-25° C ~ 40° C
<b>Dimensions</b>	Ø 90 x 91 mm [DxH]
<b>Cutting</b>	Ø 68 mm
<b>Glass</b>	Tempered frosted glass
<b>Housing</b>	AL6063
<b>Max. life time</b>	30.000 h
<b>Connection cable</b>	2 m (5 x 0,5 mm <sup>2</sup> )

**Abmessungen / Dimensions:**

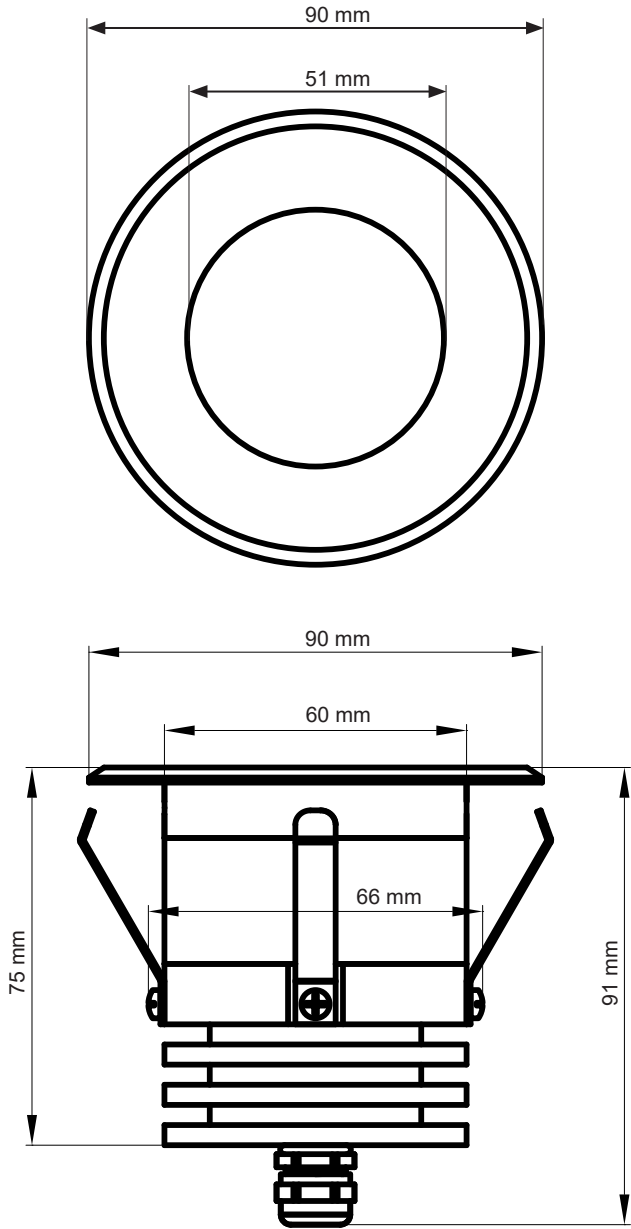

# Anschlussplan DMX / Connection DMX:

- V+** Schwarz | Black
- R** Braun | Brown
- G** Gelb/Grün | Yellow/Green
- B** Blau | Blue
- W** Grau | Gray

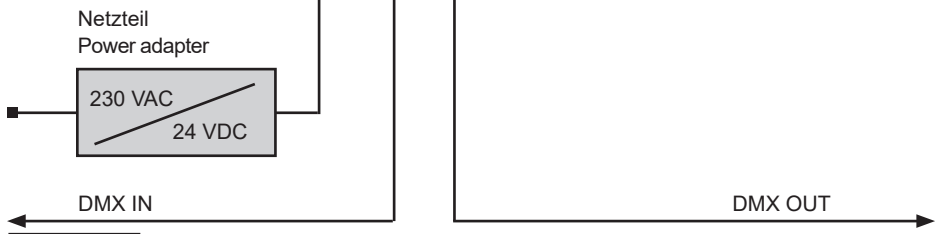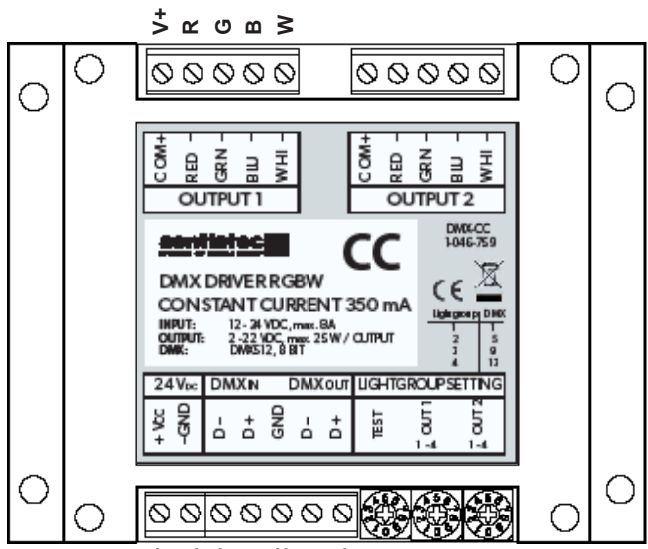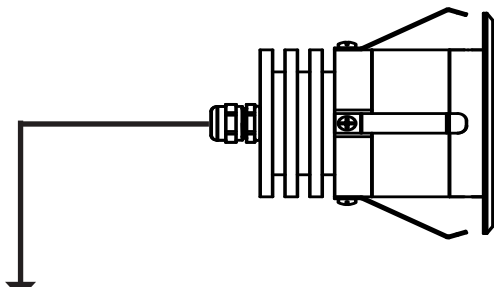

GLOBAL: Harvia Finland Oy | P.O. Box 12 | Teollisuustie 1-7 | 40951 Muurame | FINLAND | +358 207 464 000 | harvia@harvia.fi  
 CENTRAL EUROPE: Harvia Austria GmbH | Wartenburger Straße 31 | A-4840 Vöcklabruck | +43 (0) 7672/22900-50 | info@harvia.com  
 www.harvia.com



# SPOT LED RGBW 5 W

LED-SP-RGBW-5 / 1-049-836

# CC

350 mA

Instructions de montage  
Guia de instalação

FR

PT



**COURANT CONSTANT  
CORRENTE CONSTANTE**


## Caractéristiques techniques :

<b>Puissance</b>	5 W
<b>Alimentation</b>	Courant constant CC 4 x 350 mA Anode commune
<b>Rendement lumineux</b>	120 lm
<b>Module de contrôle DMX</b>	DMX-CC / 1-046-759
<b>CRI</b>	Ra > 80
<b>Classe IP</b>	IP65, HR 0-99 %
<b>Température max. face avant</b>	-25 °C ~ 125 °C
<b>Température max. face arrière</b>	-25 °C ~ 40 °C
<b>Dimensions</b>	Ø 90 x 91 mm [dxh]
<b>Découpe</b>	Ø 68 mm
<b>Verre</b>	Verre dépoli trempé
<b>Boîtier</b>	AL6063
<b>Durée de vie max.</b>	30 000 h
<b>Câble de raccordement</b>	2 m (5 x 0,5 mm <sup>2</sup> )

## Dados técnicos:




<b>Potência</b>	5 W
<b>Alimentação</b>	Corrente constante CC 4 x 350 mA Ânodo comum
<b>Eficiência luminosa</b>	120 lm
<b>Controlador DMX</b>	DMX-CC/1-046-759
<b>CRI</b>	Ra > 80
<b>Grau IP</b>	IP65, 0-99% rH
<b>Temperatura máx. na parte da frente</b>	-25 °C ~ 125 °C
<b>Temperatura máx. na parte de trás</b>	-25 °C ~ 40 °C
<b>Dimensões</b>	Ø 90 x 91 mm [DxA]
<b>Segmento</b>	Ø 68 mm
<b>Vidro</b>	Vidro leitoso temperado
<b>Caixa</b>	AL6063
<b>Vida útil máx.</b>	30 000 h
<b>Cabo de ligação</b>	2 m (5 x 0,5 mm <sup>2</sup> )

**Dimensions / Dimensões:**

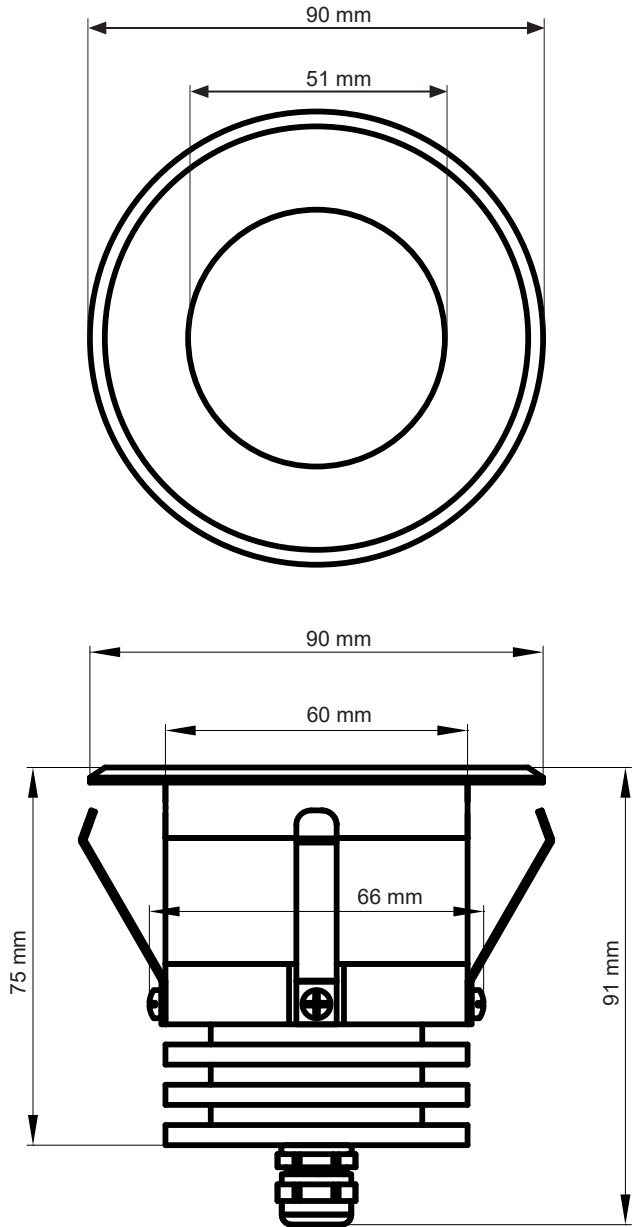

## Schéma de raccordement DMX / Esquema de ligações DMX:

- V+** Noir | Preto
- R** Marron | Castanho
- G** Jaune/vert | Amarelo/verde
- B** Bleu | Azul
- W** Gris | Cinzento

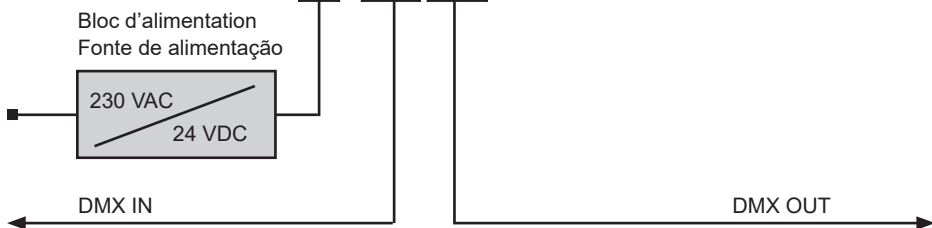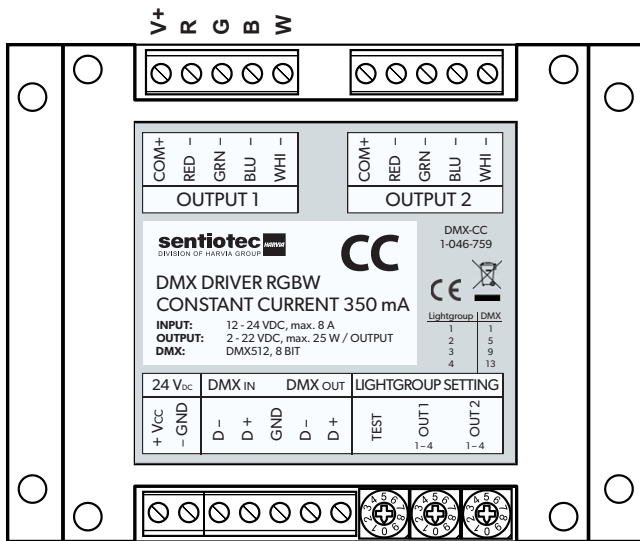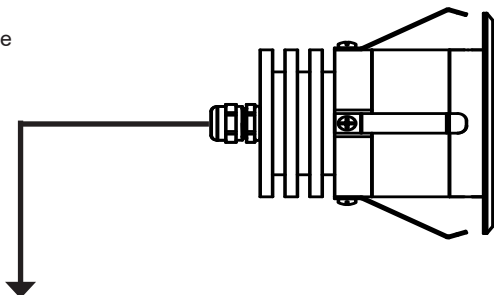

GLOBAL: Harvia Finland Oy | P.O. Box 12 | Teollisuustie 1-7 | 40951 Muurame | FINLAND | +358 207 464 000 | harvia@harvia.fi  
 CENTRAL EUROPE: Harvia Austria GmbH | Wartenburger Straße 31 | A-4840 Vöcklabruck | +43 (0) 7672/22900-50 | info@harvia.com  
 www.harvia.com

